

INSTALLATION PROCEDURE FOR KICKING PLATE FRONT:

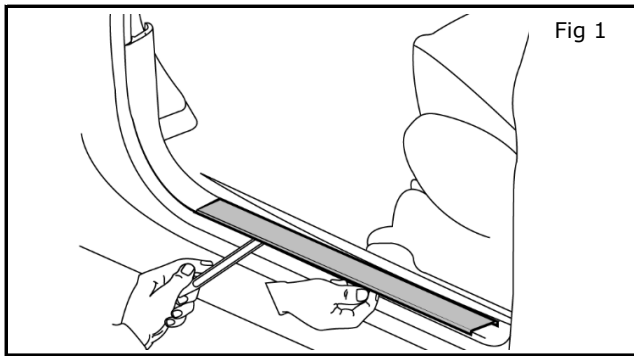


Fig 1

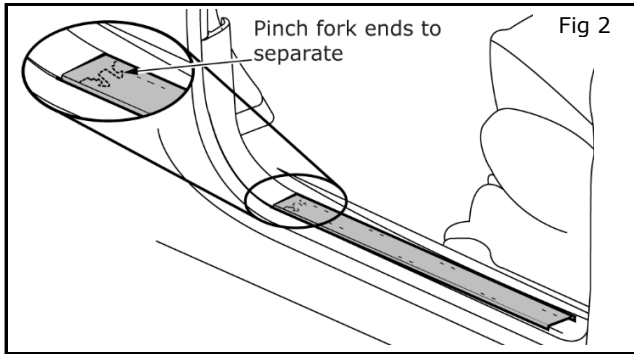


Fig 2


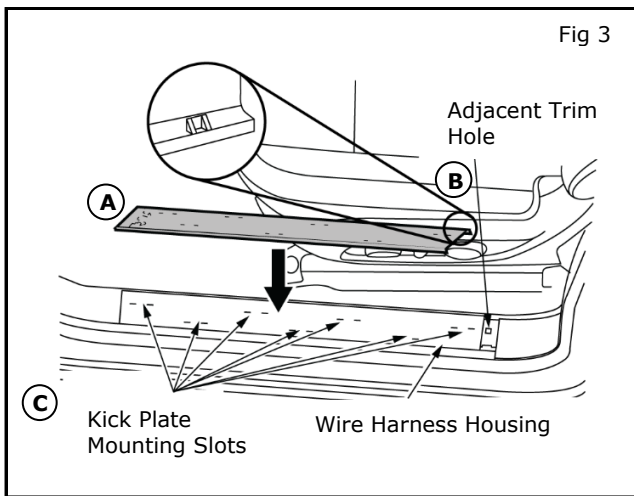



Fig 3

- 1) Removal of existing kick plate.
 - a) Insert plastic trim removal tool under kick plate. Carefully Loosen and lift kick plate for removal.
 - b) Lift kick plate from rear to front, disengaging from clips. Separate the Kick Plate from dash side panel by pinching the fork and sliding the kick plate rearward.
- 2) Install new kick plate.
 - a) Slide front over fork shaped end (A).
 - b) At rear of kick plate, ensure locating feature (B) is properly positioned. Ensure snap features at edge of kick plate are engaged.
 - c) Engage 7 large clips with corresponding slots (C) in wire harness housing and press down in each of seven locations for reinstallation.
- 3) Repeat procedure for opposite side.

INSTALLATION PROCEDURE FOR KICKING PLATE REAR:

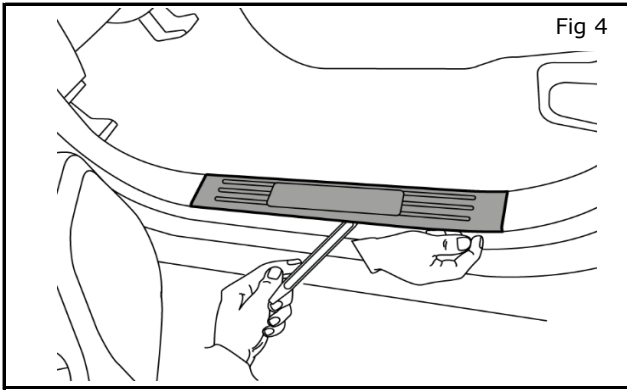

- 4) Removal of existing kick plate.
Insert plastic trim removal tool under kick plate.
Carefully Loosen and lift kick plate for removal,
disengaging push pins.

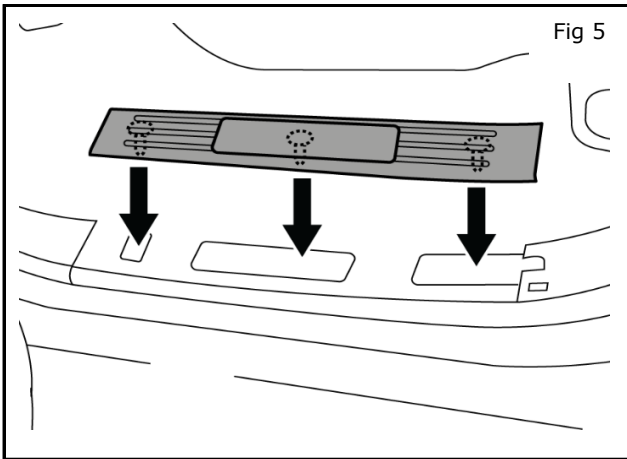

- 5) Install new kick plate
- a) Align three (3) Push pins with corresponding slots in wire harness housing and press down in each of three locations to begin reinstallation.
 - b) At front of kick plate, ensure locating features are properly positioned. Ensure snap feature at the front and rear edge of the kick plate are engaged.
- 6) Repeat procedure for opposite side.