


TEQSPORT 2025+ 4RUNNER GRILLE LIGHTS INSTALLATION MANUAL

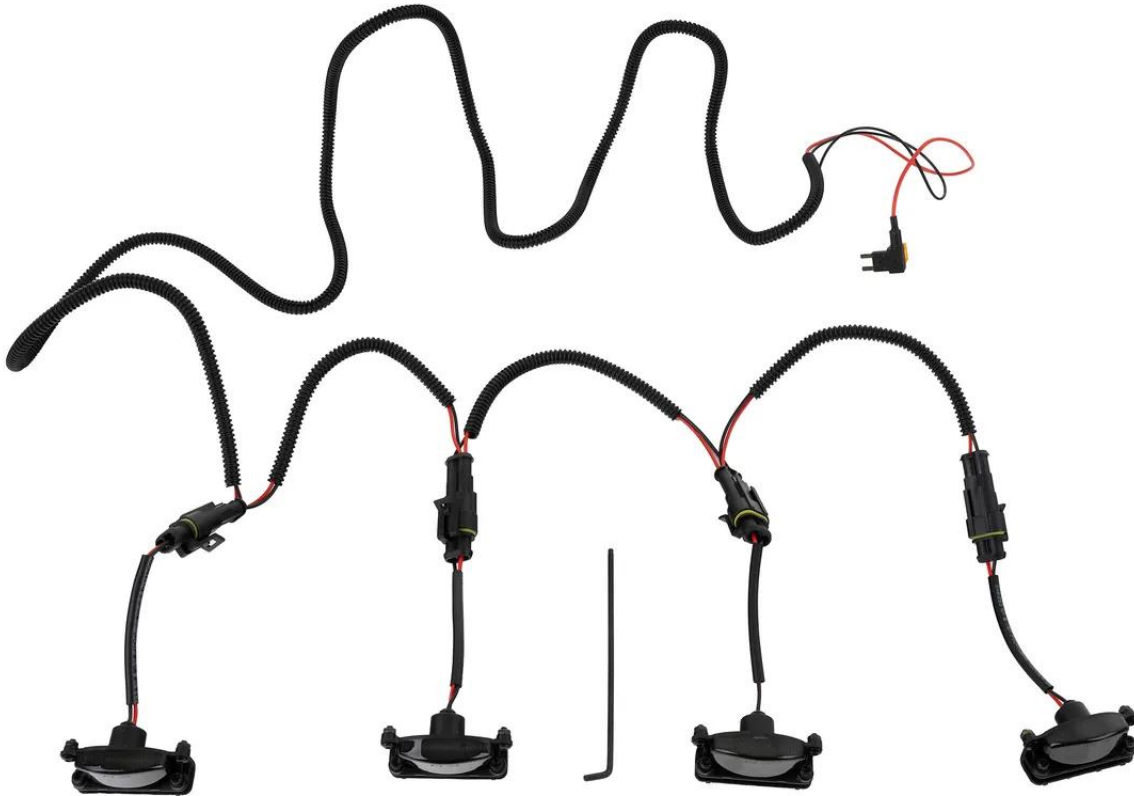

This Installation Manual is intended for the following models:	
2025+	Toyota 4Runner

PROLOGUE:

Study these instructions completely before proceeding to assembly. The installer must have a thorough knowledge of automotive systems operation. If unfamiliar with any of the concepts outlined in this instruction, we recommend the installation be completed by a qualified professional.

WARNING!

Extreme caution should be taken when performing maintenance or performance upgrades to your vehicle. Please observe and abide by any Warning or Caution labels placed on the various components and tools used when servicing your vehicle. If you have any questions regarding installation or the various components included with the TEQSPORT 2025+ Toyota 4Runner Grille Lights, consult with a Professional Mechanic, or contact TEQSPORT for more information.

PARTS INCLUDED:

Item	Quantity	Description
1	1	Grille Light Harness
2	1	Add-A-Circuit Fuse
3	4	Light Bracket
4	8	M3 x 8mm Socket Head Screw
5	8	M3 x 6mm Black Socket Head Screw
6	8	M3 Hex Nut
7	4	Grille Light Clip
8	1	Hex Key

TOOLS REQUIRED:

- Ratchet
- Ratchet Extension(s)
- Assorted Metric Wrenches
- 10mm Socket
- 5.5mm Socket
- Allen/Hex Keys

SAFETY REQUIREMENTS:

- Always wear safety glasses and any necessary protective garments. If using any fluids, chemicals, or solvents, a respirator is recommended.
- Always turn the ignition to the OFF position and disconnect the NEGATIVE battery terminal.
- Always use properly rated jack stands when working under your vehicle.
- Always keep limbs and parts away from moving drivetrain parts.
- Only operate drivetrain in a safe space and well-ventilated areas.

BEFORE YOU BEGIN:

Remove contents from the TEQSPORT 2025+ 4Runner Grille Lights and verify that ALL necessary hardware is present.

PROCEDURE:

1. Place the transmission in Park position and apply the parking brake.
2. Open and support the hood of the vehicle.
3. Locate (4) four Grille Lights, (4) four Grille Light Clips, (8) eight M3 x 6mm Black Button Head Screws and (8) eight M3 Hex Nuts. Position (1) one Grille Light into each Light Clip as shown and secure with (2) two M3 Button Head Screws and Hex Nuts each. *Figure 1.*



Figure 1

4. Remove the (4) four Plastic Push Tabs securing the Radiator Air Guide on top of the Radiator and set the Air Guide aside. *Figure 2.*

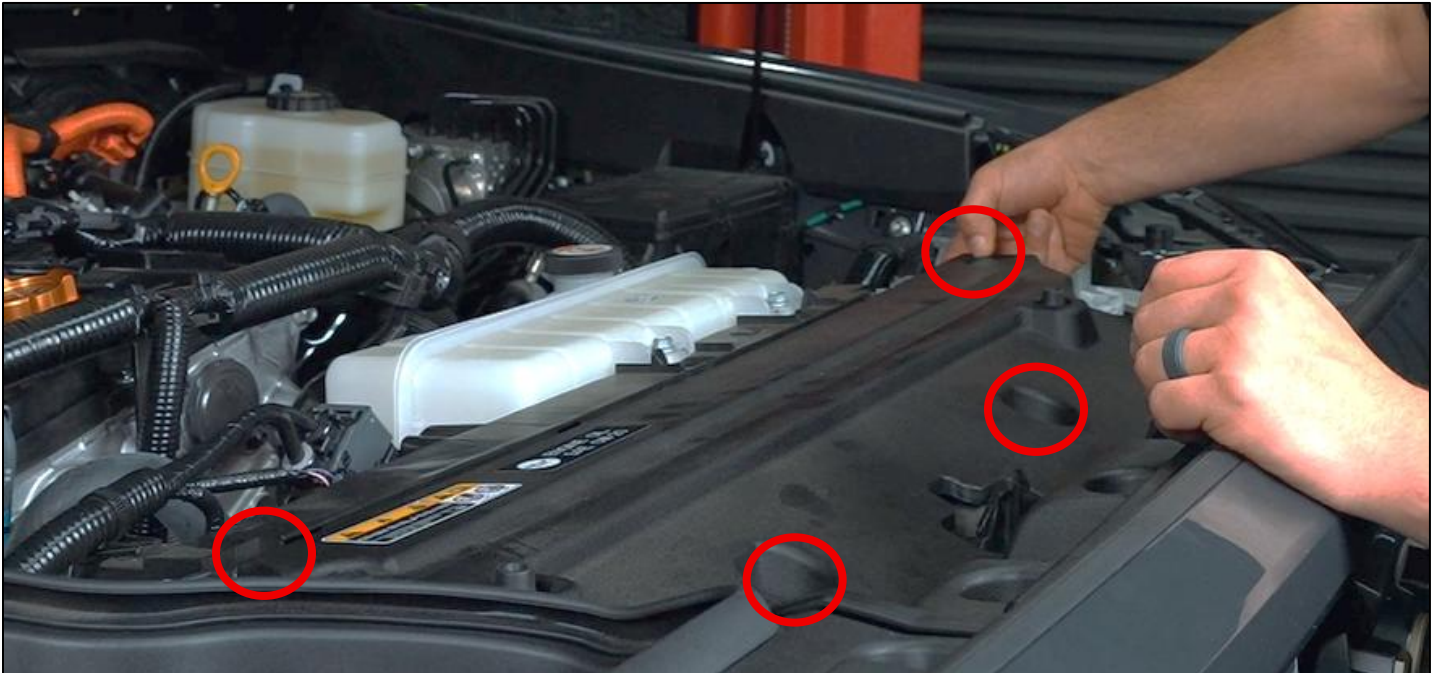


Figure 2

5. Remove the (3) three Plastic Push Tabs securing the Air Intake Guide to the Core Support and set the Air Guide aside. *Figure 3.*



Figure 3

6. Locate the Grille Light Harness. Route the end with the Add-a-Fuse towards the Fuse Box on the Driver Side of the Engine Bay, passing through the Core Support towards the Front Grille. *Figure 4.*

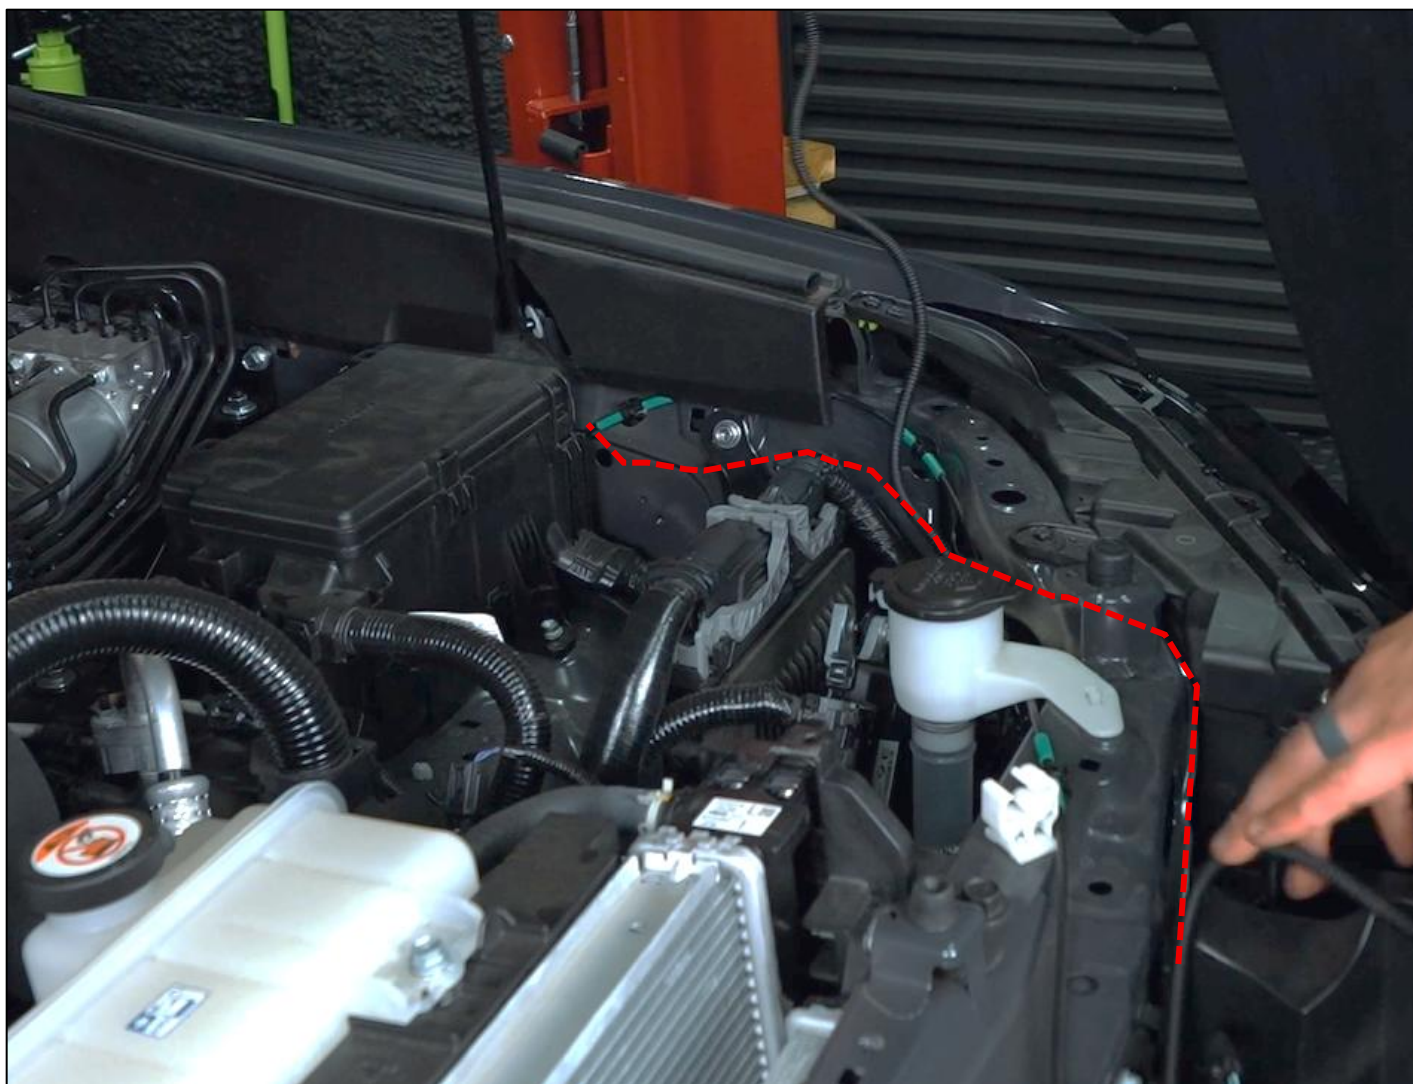


Figure 4

7. Route the Light Connector at the end of the Grille Light Harness under the center support bracket and towards the top of the Passenger Side of the Front Grille.
8. Insert each of the (4) four Grille Light Connectors on the Harness through the opening under the Tabs on the Front Grille. *Figure 5.*

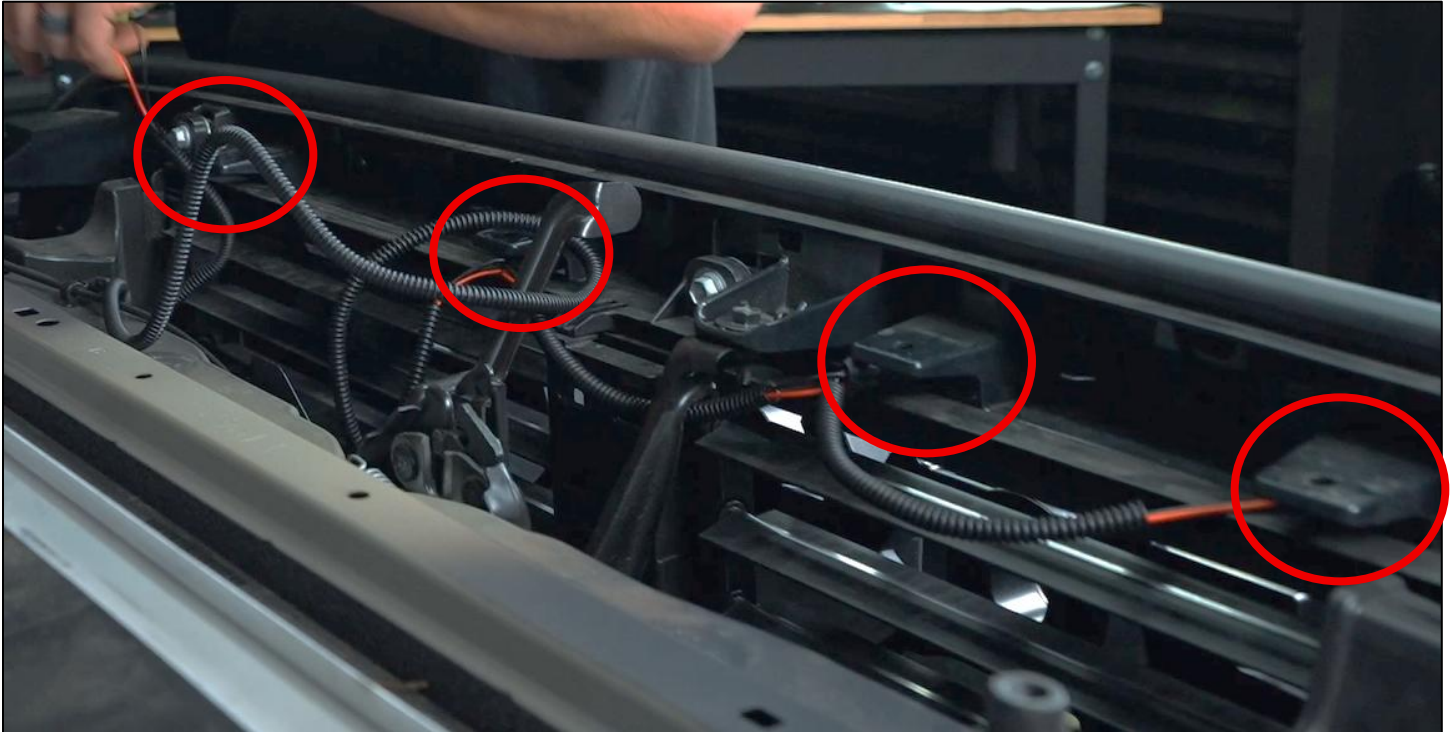


Figure 5

9. Locate the (4) four Grille Lights. Connect (1) one Grille Light to the Grille Light Harness from the front of the vehicle.

10. Locate (8) eight M3 x 8mm Socket Head Screws. Loosely install (2) two Socket Head Screws into each Grille Light Clip. Position the Clips onto the Plastic of the Front Grille. Once the Clips are in place, use the included Ball-End Hex Key to tighten the Socket Head Screws and secure the Grille Light Clips to the vehicle. *Figure 6.*

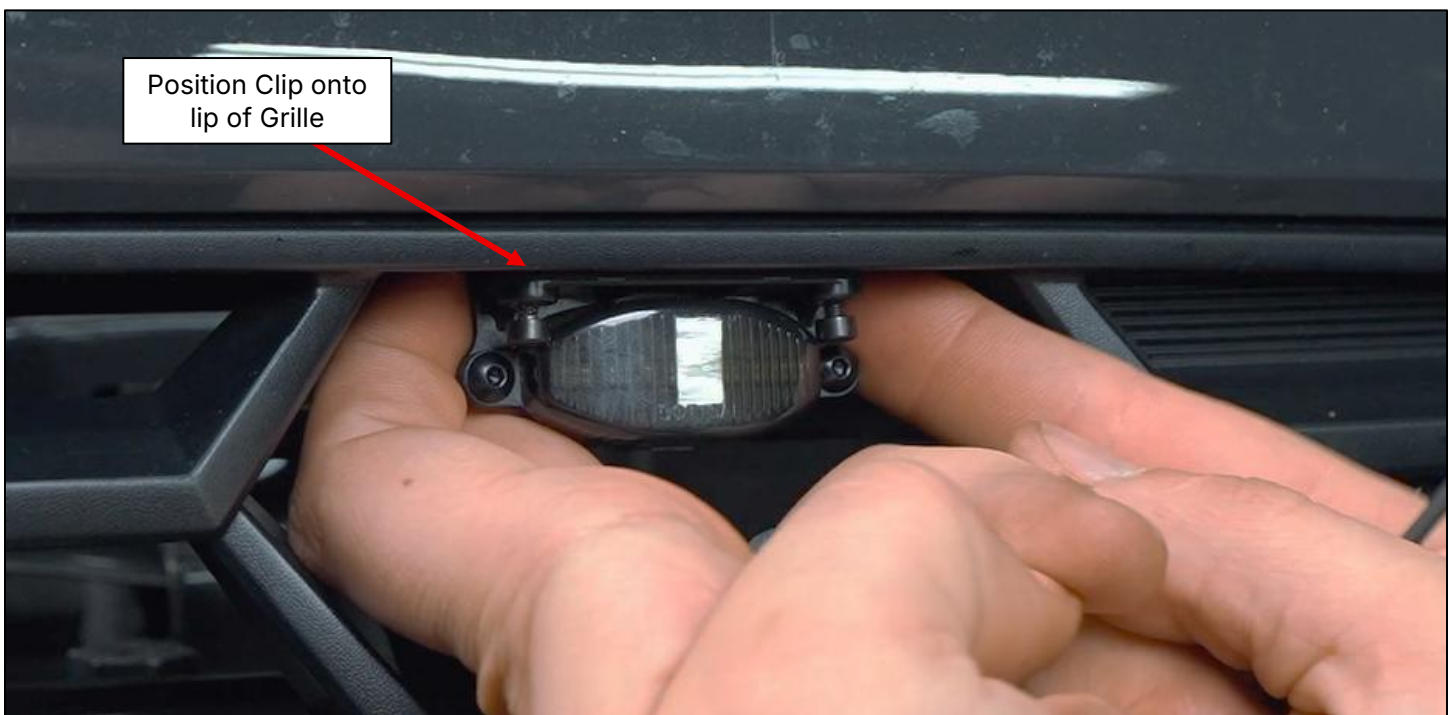


Figure 6

11. Pull the Wiring Harness back into the engine bay to prevent any loose wires hanging in the front of the vehicle. Use zip ties to secure the wiring harness out of the way and away from sharp edges/moving parts.
12. Open the Fuse Box.
13. Locate a Fuse you wish to tap into, the Fuse should be either Ignition or Accessory power so that the Grille Lights only have power when the vehicle is on. We chose to use the Rear Seat Heater Fuse. Remove the Fuse and add it to the Add-a-Circuit Connector on the Wiring Harness. *Figure 7.*



Figure 7

14. Plug the Add-a-Circuit connector into the slot where the fuse was removed in *Step 14. Figure 8.*



Figure 8

15. Using Pliers or Scissors, notch the Fuse Box Lid to allow the Grille Light Harness to pass through without being pinched once the Fuse Box lid is reinstalled. *Figure 9.*



Figure 9

16. Remove the nut towards the front of the Fuse Box and attach the Ground Cable from the Wiring Harness. Reinstall the nut afterwards. *Figure 10.*

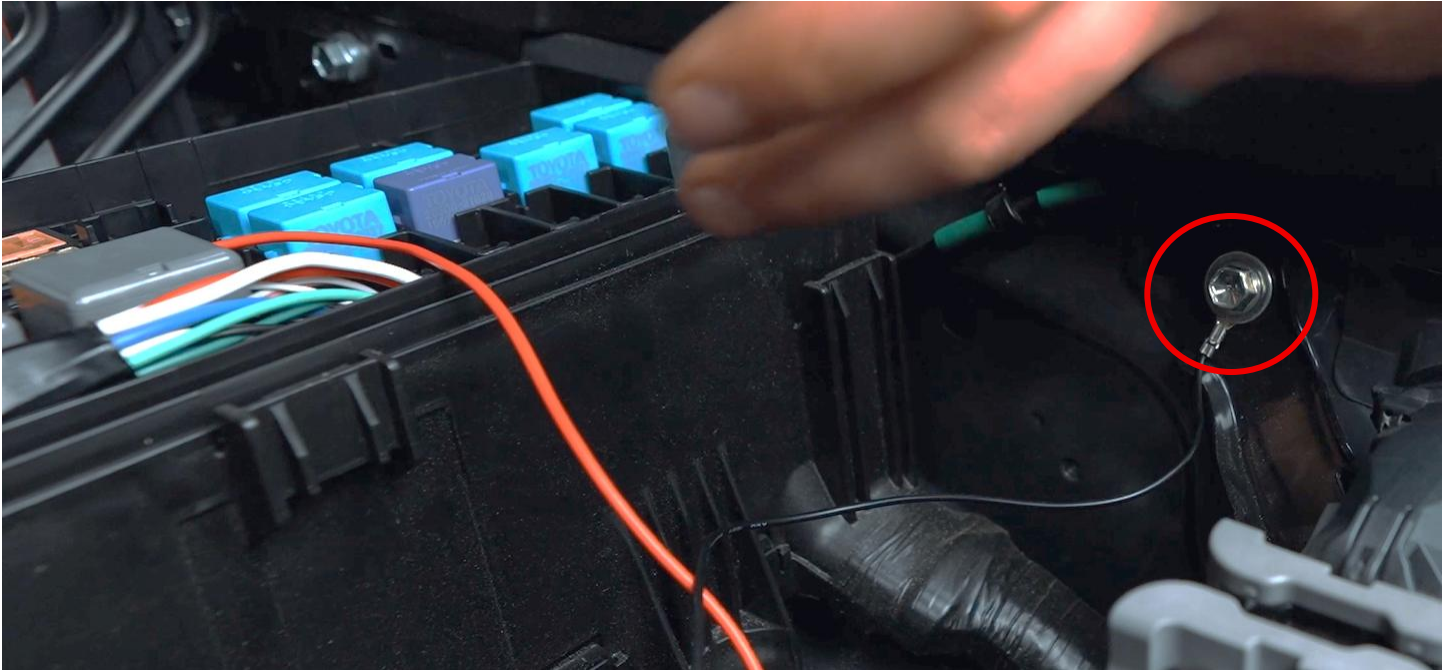


Figure 10

17. Tuck the Grille Light Harness out of the way and zip tie as necessary.

18. Start the vehicle to test the function of the Grille Lights.

19. Reinstall the Air Intake and Radiator Air Guide.

END

Additional Technical Support:
Contact TEQSPORT at info@teqsport.com
Or call 770-832-7184 between 9am and 6pm ET