

TEQSPORT OIL FILL CAP INSTALLATION MANUAL

**PROLOGUE:**

Study these instructions completely before proceeding to assembly. The installer must have a thorough knowledge of automotive systems operation. If unfamiliar with any of the concepts outlined in this instruction, we recommend the installation be completed by a qualified professional.

WARNING!

Extreme caution should be taken when performing maintenance or performance upgrades to your vehicle. Please observe and abide by any Warning or Caution labels placed on the various components and tools used when servicing your vehicle. If you have any questions regarding installation or the various components included with the TEQSPORT Oil Fill Cap, consult with a Professional Mechanic, or contact TEQSPORT for more information.

PARTS INCLUDED:

Item	Quantity	Description
1	1	Oil Fill Cap
2	1	Medallion
3	1	Cap Seal
4	1	Medallion O-Ring

TOOLS REQUIRED:

- None

SAFETY REQUIREMENTS:

- Always wear safety glasses and any necessary protective garments. If using any fluids, chemicals, or solvents, a respirator is recommended.
- Always turn the ignition to the OFF position and disconnect the NEGATIVE battery terminal.
- Always use properly rated jack stands when working under your vehicle.
- Always keep limbs and parts away from moving drivetrain parts.
- Only operate drivetrain in a safe space and well-ventilated areas.

BEFORE YOU BEGIN:

Remove contents from the TEQSPORT Oil Fill Caps and verify that ALL necessary hardware is present.

PROCEDURE:

1. Locate the Oil Fill Cap and Cap Seal. Start the Cap Seal onto the lower ridge of the Oil Fill Cap. The Flat Side of the Seal will mate up against the Oil Fil Cap. *Figure 1.*

The Ridged Side will
face away from the
Oil Fill Cap

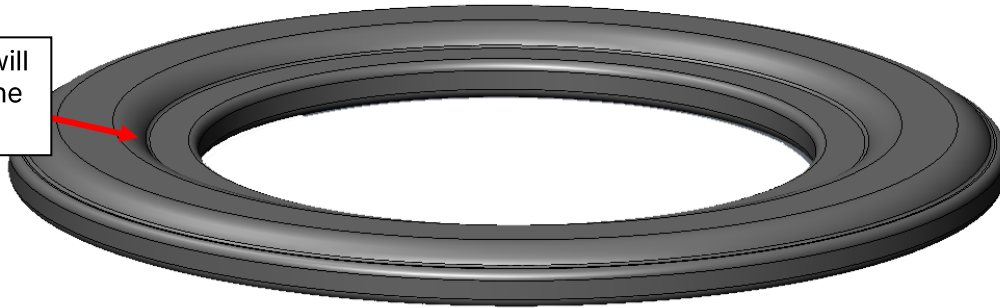


Figure 1

2. Work the Cap Seal down until it is fully seated on the Fill Cap. Ensure the Seal is fully seated and is not over any of the threads. *Figure 2.*

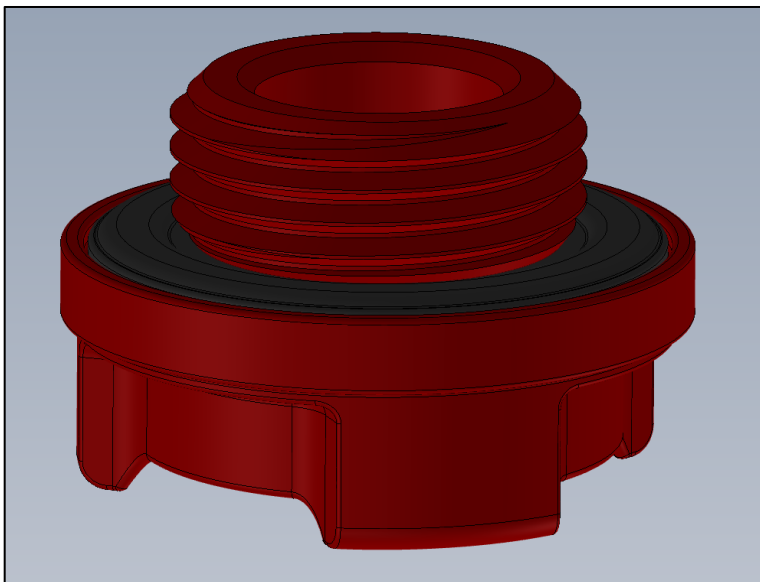


Figure 2

3. Locate the Medallion and Medallion O-Ring. Place the O-Ring onto the Medallion. *Figure 3.*



Figure 3

4. Remove the OE Oil Fill Cap and replace it with the TEQSport Oil Fill Cap. Using a small amount of Engine Oil on the Cap Seal can help prevent the Fill Cap from being difficult to remove when the Engine Heats up.
5. With the Oil Fill Cap installed, insert the Medallion into the top of the Oil Fill Cap in the orientation you desire. The Medallion can be turned if needed but can be difficult. *Figure 4.*

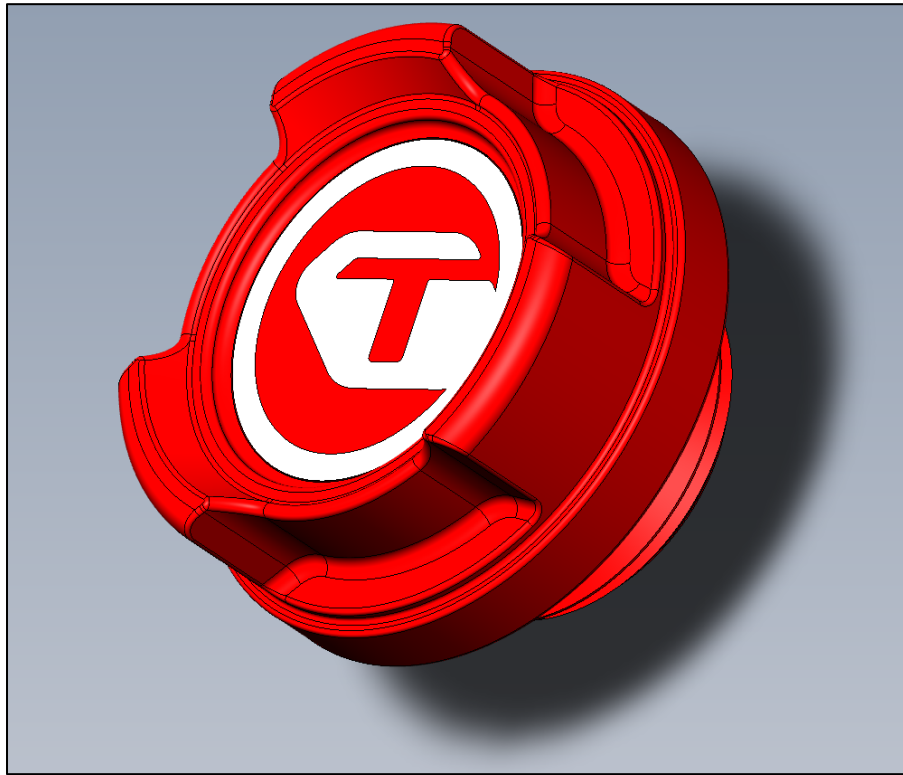


Figure 4

END

Additional Technical Support:

Contact TEQSPORT at info@teqsport.com
Or call 770-832-7184 between 9am and 6pm ET