

300ZX / 350Z REAR WIPER DELETE KIT INSTALLATION MANUAL



This Installation Manual is intended for the following models:

1989-2000	Nissan 300ZX
2003-2009	Nissan 350Z

PROLOGUE:

Study these instructions completely before proceeding to assembly. The installer must have a thorough knowledge of automotive systems operation. If unfamiliar with any of the concepts outlined in this instruction, we recommend the installation be completed by a qualified professional.

WARNING!

Extreme caution should be taken when performing maintenance or performance upgrades to your vehicle. Please observe and abide by any Warning or Caution labels placed on the various components and tools used when servicing your vehicle. If you have any questions regarding installation or the various components included with the Z1 Motorsports 300ZX / 350Z Rear Wiper Delete Kit, consult with a Professional Mechanic or contact Z1 Motorsports for more information.

PARTS INCLUDED:

Item	Quantity	Description
1	1	Wiper Delete – Outer
2	1	Wiper Delete – Inner
3	1	Rubber Washer
4	1	M6 x 30mm Stud

TOOLS REQUIRED:

- Ratchet
- 10mm Socket/Wrench
- 12mm Socket/Wrench
- 13mm Socket/Wrench
- Interior Trim Removal Tool
- Flat-head Screwdriver
- Philips-head Screwdriver

SAFETY REQUIREMENTS:


- Always wear safety glasses and any necessary protective garments. If using any fluids, chemicals, or solvents, a respirator is recommended.
- Always keep limbs and parts away from moving drivetrain parts.
- Only operate drivetrain in safe space and well-ventilated areas.

BEFORE YOU BEGIN:

Remove contents from the Z1 Motorsports 300ZX / 350Z Rear Wiper Delete Kit and verify that ALL necessary hardware is present.


PROCEDURE:

1. Assure the car's ignition is in the OFF position and the NEGATIVE (-) battery terminal is disconnected.
2. Place the transmission in Park position (or in Reverse gear if equipped with a manual transmission). Apply the parking brake.
3. Remove the plastic cover on the base of the rear wiper. Remove the 12mm nut attaching the wiper to the wiper motor.
4. Unlatch and raise rear hatch.
5. Using an interior trim removal tool (Philips-head screwdriver for 300zx) remove the plastic trim on underside of rear hatch exposing the wiper motor.
6. Unplug the electrical connector on the wiper motor. Zip tie connector back out of the way.
7. Remove (3) bolts attaching wiper motor to underside of rear hatch. Remove wiper, pivot cap, and wiper motor.

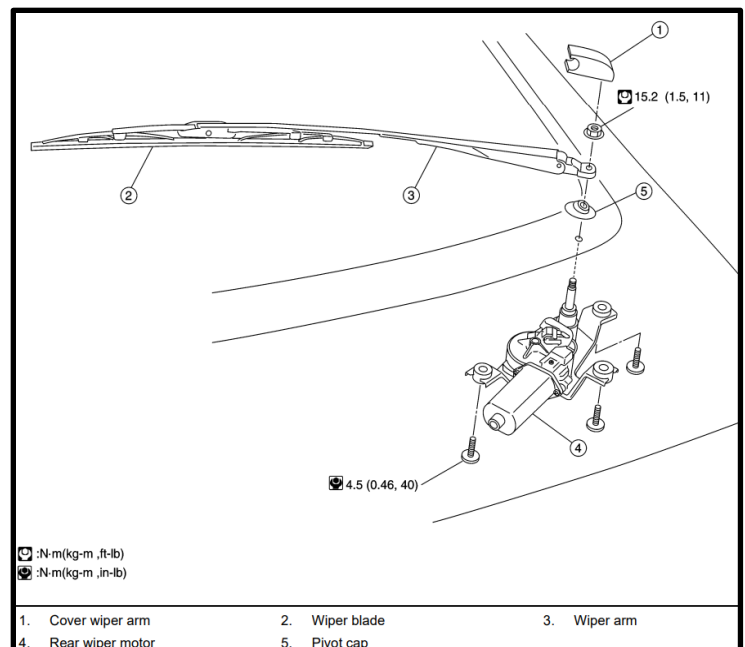

8. Locate wiper delete assembly. Wiper delete will come pre-assembled, separate inner piece from outer piece.

Note: Stud will remain in outer piece. Inner piece should be hand tight, otherwise use 13mm wrench to separate.

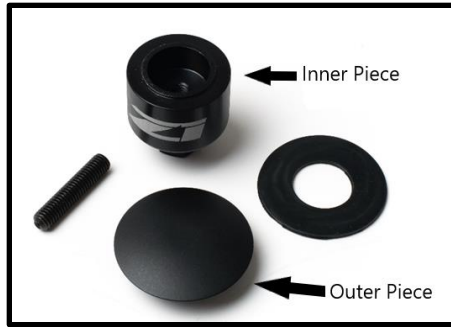

9. Place outer piece with rubber washer and stud in exposed hole.
10. On underside of hatch, thread inner piece onto outer piece. Tighten with a 13mm socket/wrench.



11. Reattach plastic trim on underside of hatch.
12. Inspect vehicle for loose tools/items.

END

Additional Technical Support:
Contact Z1 Motorsports at info@z1motorsports.com
Or call 770-838-7777 between 9am and 6pm ET

